




W SADDLE FABRICATION MACHINE

Product Profile :

- High performance Saddle fabricating machine for fabricating a reducing tee in a workshop.
- Linear guideways are equipped with the dragging and the heating plate.
- Unique integrated function of welding and taping in a single machine enables the complete process accomplished.
- High quality anti-stick PTFE coated heating plate with precision temperature control system.
- Equipped with two inbuilt timer controller for notifying soaking & cooling time.
- Equipped with digital pressure meter for precise welding.

On Request • Heating saddle and hole saws to be ordered based on individual requirements.

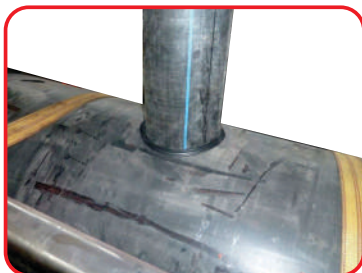

**INNOVATIVE
CANADIAN
TECHNOLOGY**
a step ahead.



Product Specifications

Model No.	SADDLE630	SADDLE800	SADDLE1000	SADDLE1200
Main Pipe Range (Metric - OD)	315 – 630 MM	400 – 800 MM	500 – 1000 MM	560 – 1200 MM
Maximum Branch Possible (OD)	≤ 315 MM	≤ 400 MM	≤ 500 MM	≤ 560 MM
Max. Heater Temp.	270°C	270°C	270°C	270°C
Pressure Ranges	0 ~ 16 MPa	0 ~ 16 MPa	0 ~ 16 MPa	0 ~ 16 MPa
Input Voltage Req.	380V, 50HZ, 3P	380V, 50HZ, 3P	380V, 50HZ, 3P	380V, 50HZ, 3P
Heater Power	9 ~ 13 KW			
Hydraulic Unit Power	1.5 KW	1.5 KW	1.5 KW	1.5 KW
Drill Motor Power Req.	1.6 – 3.1 KW			
Total Power Req.	12.1 – 17.6 KW			
Gross Weight	Approx 1850 KG			